




www.edilock-bg.com

www.vag-info.com

FIAT IMMO EMULATOR

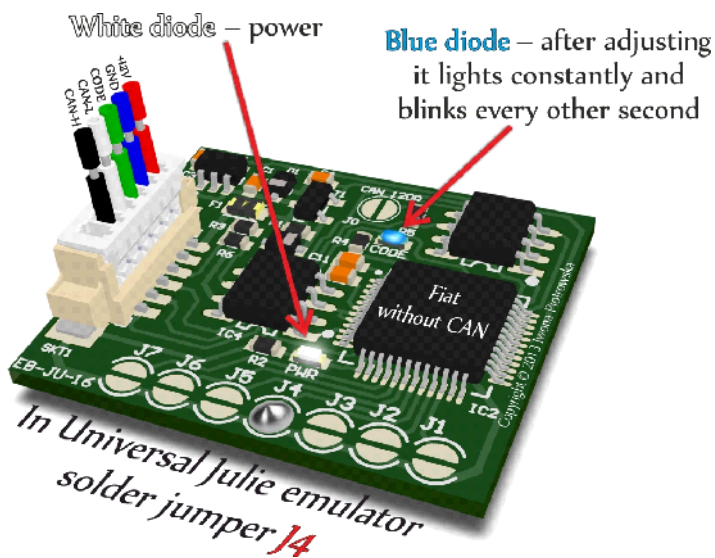

USE:

Fiat, Citroen, Peugeot diesel
2-socket ECU

Alfa, Lancia, Fiat,
1.9 Jtd 2.4 Jtd 5-socket ECU

IAW49F

Fiat Bravo 1.6 16V

IAW 4AF

Fiat Seicento, Panda 1.1 8V


Lancia Kappa 2.0i 16V Turbo
0 261 203 792

Lancia Kappa 2.0i 20V
0 261 203 670



Lancia Kappa 2.4i 16V
0 261 203 669

Lancia Kappa 3.0i 24V
0 261 203 482

Fiat, Citroen, Peugeot diesel 2-socket ECU

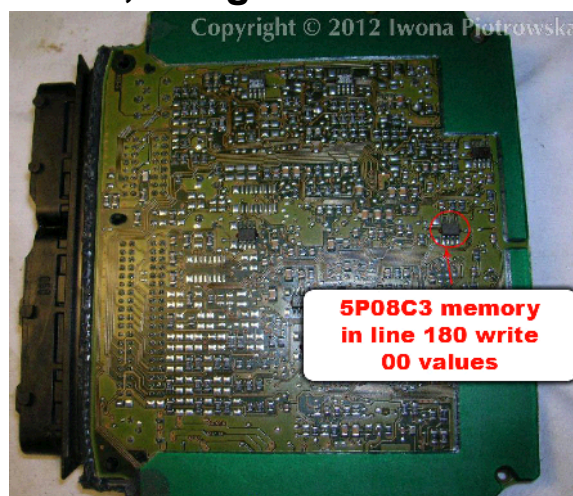


After modifying 5P08C3 memory in line 180 into 00 values, connect emulator in place of the original immobiliser

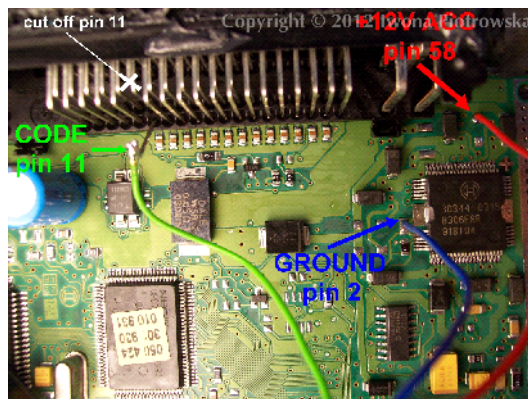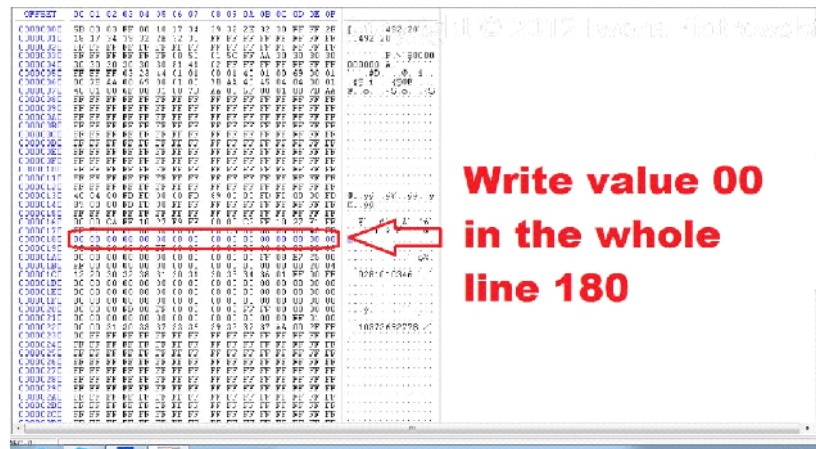



Connecting emulator to ECU

GND	pin 1 or 2 or 3
ACC	pin 4 or 5
Code	pin 11 (cut-off)

Alfa, Lancia, Fiat 1.9 Jtd 2.4 Jtd 5-socket ECU

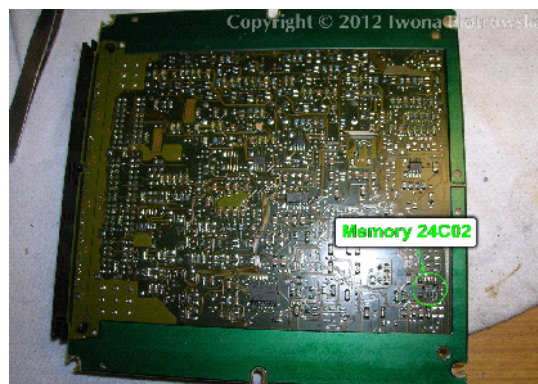


In addresses from 1EA to 1F9, change these values into 00 in 24C02 memory

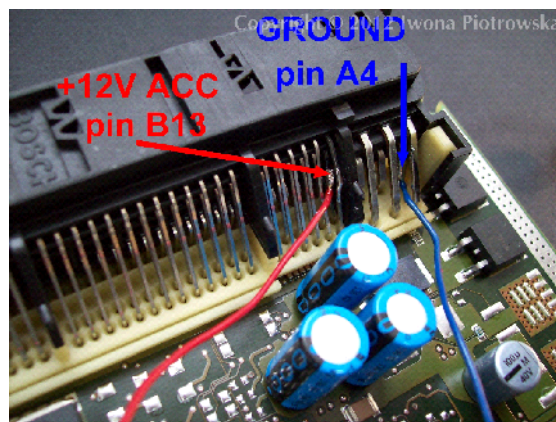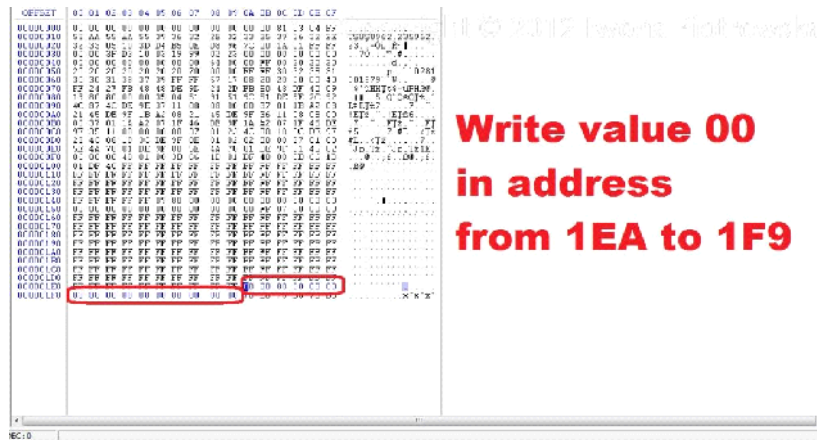


Connecting emulator to ECU

GND	pin A. 4, 5, 6
ACC	pin B. 13
Code	pin C. 13 (cut off)

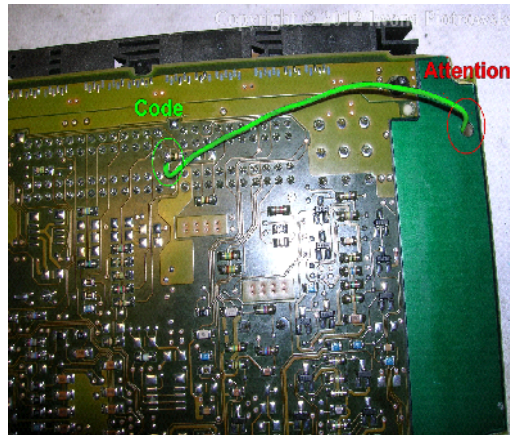

ATTENTION!

When putting ECU back together, put a piece of cardboard on the wire making sure not to tighten it firmly in this area. Alternatively, break off a piece of clamp holder and drag the cable over to the other side

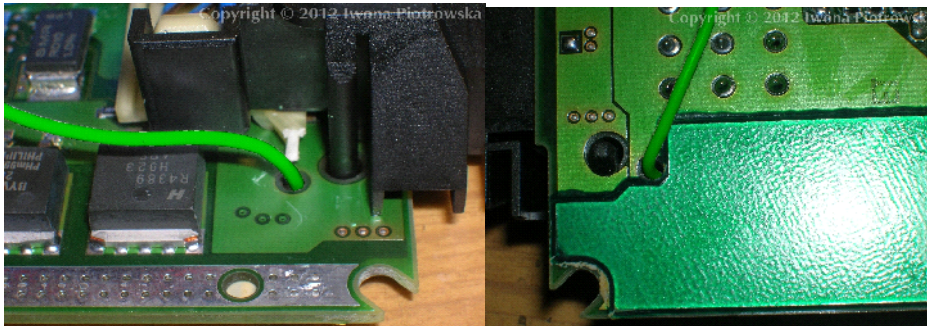


IAW49F

Fiat Bravo 1.6 16V




Find memory 95040 in ECU
and then program it according to picture below

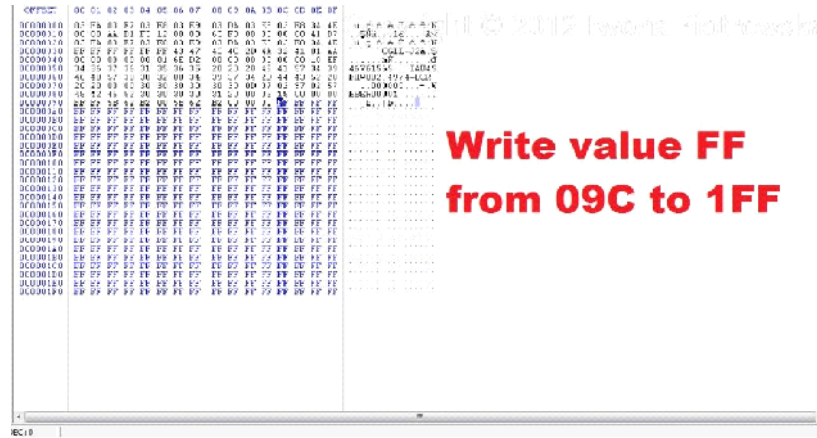


Connecting emulator to ECU

GND	pin 27, 28
ACC	Pin 47
Code	pin 13 (cut off)

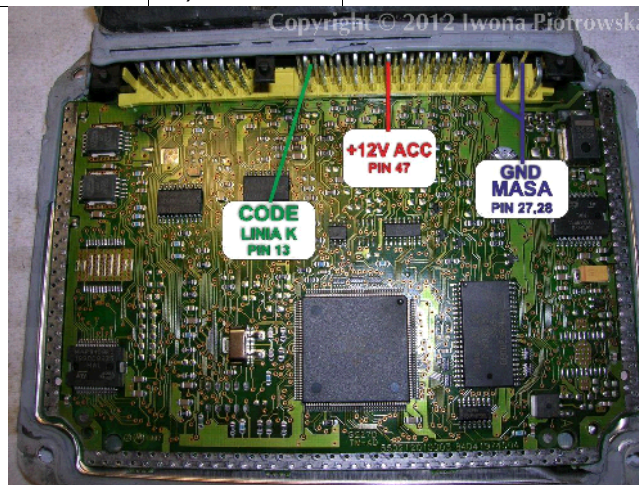


IAW 4AF
Fiat Seicento, Panda 1.1 8V

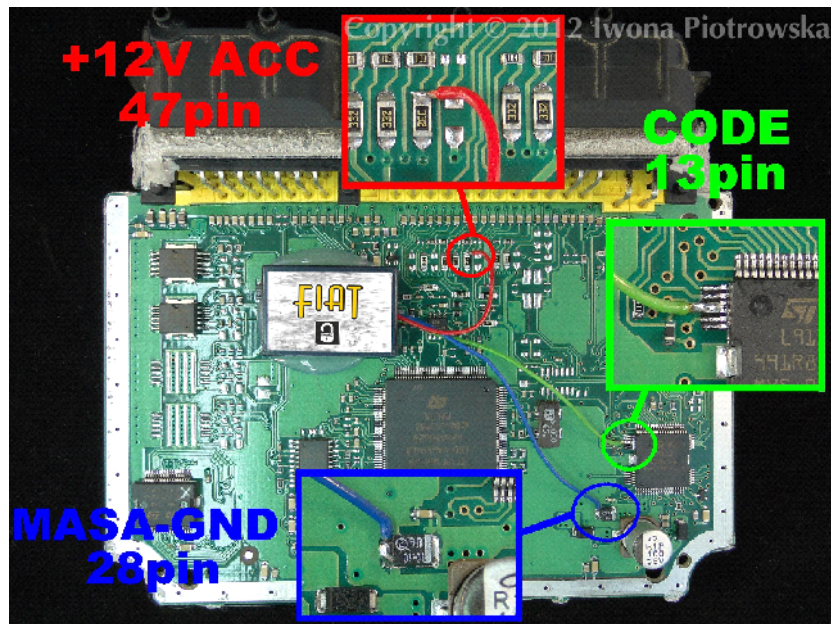

Connecting emulator to ECU

GND	pin 27 or 28
ACC	pin 47
Code	pin 13 (cut off)

Find memory 95160 in ECU
and then program it according to picture below

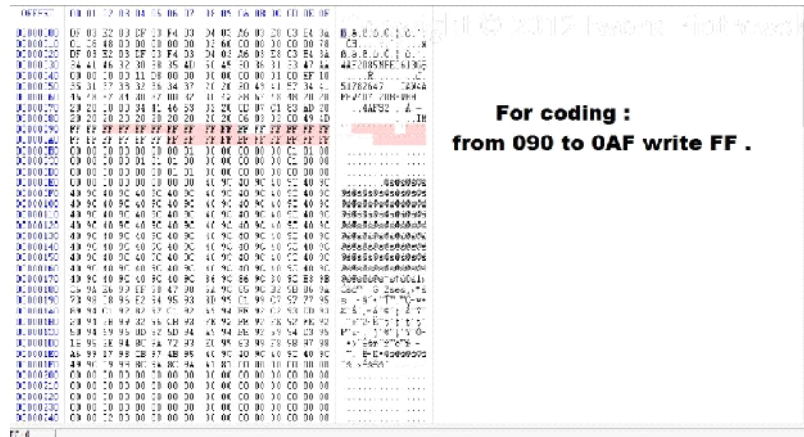

**Lancia Kappa 2.0i 16V Turbo
0 261 203 792**



Connecting emulator to ECU

GND	pin 14, 24, 19
ACC	pin 37 or 27
Code	pin 55




Connect immo line to pin 55. Disconnect immo. Connect A6 and A5 together.

To have diagnosis, the immo line must be made in the reset button.

This device self-learns ECU code

Lancia Kappa 2.0i 20V
0 261 203 670

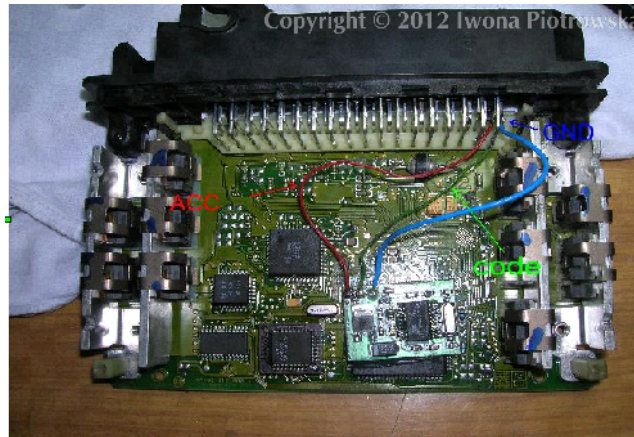


Connecting emulator to ECU

GND	pin 2, 14, 19, 24
ACC	pin 27 or 37
Code	pin 55

To have diagnosis, the immo line must be made in the reset button.
 Connect A6 and A5 together.
 This device self-learns ECU code

Lancia Kappa 2.4i 16V 0 261 203 669

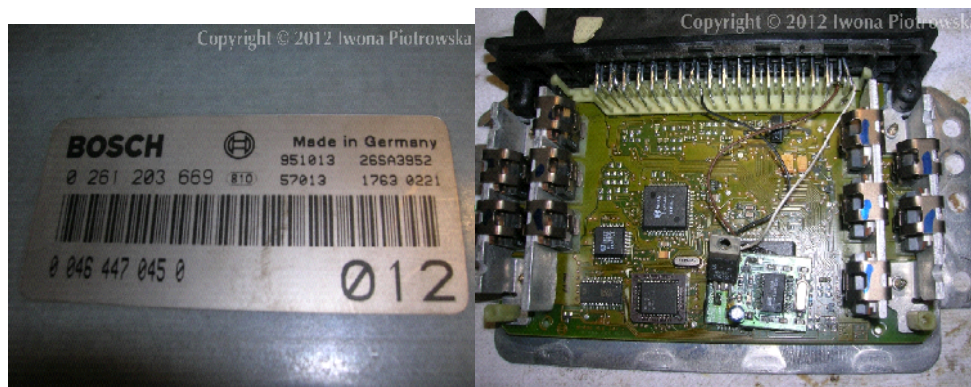

Connecting emulator to ECU

GND	pin 19
ACC	pin 27
Code	pin 55

This device self-learns ECU code
 Connect immo line to pin 55. Disconnect immo. Connect A6 and A5 together.

To have diagnosis, the immo line must be made in the reset button

Lancia Kappa 3.0i 24V
0 261 203 482



Connecting emulator to ECU

GND	pin 55
ACC	pin 56
Code	pin 88

Warning!!!

We state, that we are the only authentic authors of this manual. We possess copyright to this publication. All rights reserved. Unauthorized copying, hiring, lending, public performance will be punished!!! Any trials of unauthorized copying, hiring, quoting prohibited!!! Both service and advertisement constitute copyright and they are the subject to the protection in accordance with the Act from 4th Feb. 1994 on Copyright and Related Laws (Statute Book no. 24 position 93) and protection on the basis of the Act from 8th June 1993 on combating an unfair competition (Statute Book no. 47 position 211).

www.edilock-bg.com

www.vag-info.com